



Windows
Doors
Blinds
Sliding systems

PVC

PVC Windows

Win2Trade's windows, **French Doors**, and doors with excellent thermal properties are produced using the newest window technology and under constant quality control. They combine the quality of engineering with maximum living comfort and guarantee decades of pleasure. With a variety of décor colours, decorative bars and finishings, as well as the wide selection of accessories that we offer, windows can be created according to any taste or need.

ALUPLAST Id 4000-70 Classic

This product is most frequently chosen because of the right balance between functionality and price. Available in many different decors. Further description can be found below.



In Standard


- > 5-chamber profile > Installation depth 70 mm
- > Excellent thermal insulation and acoustic properties
- > Standard glazing 4/16 Ar / 4T, $U_g = 1.0 \text{ W / m}^2\text{K}$
- > Two aesthetic seals,
- > Circumferential seal system in the frame and sash
- > Glazing bead Soft-Line > End-cover-fittings in handle colour

Options

- > 'Anti-burglar-fittings' (WK 1 or WK 2)
- > Round glazing beads > Triple glazing > A warm edge (spacer)
- > Invisible hinges (hidden between frame and sash)
- > Balcony door with low aluminium threshold (isolated)

ALUPLAST Id 4000-85 Round

Standard frame and round line leaf.



In Standard

- > 5-chamber profile > Installation depth 85 mm
- > Excellent thermal insulation and acoustic properties
- > Standard glazing 4/16 Ar / 4T, $U_g = 1.0 \text{ W / m}^2\text{K}$
- > Two aesthetic seals,
- > Circumferential seal system in the frame and sash
- > Glazing bead Round-Line > End-cover-fittings matching the handle colour

Options

- > 'Anti-burglar-fittings' (WK 1 or WK 2)
- > Triple glazing > A warm edge (spacer)
- > Invisible hinges (hidden between frame and sash)
- > Balcony door with low aluminium threshold (isolated)

PVC

< COLOURS

ALUPLAST Entrance Door Id 4000-70

White AP-49	Grey AP-34	Anthracite AP-40	Gold Oak AP-23	Walnut AP-27	Dark Oak AP-06	Dark Green AP-30	Mahogany AP-05
----------------	---------------	---------------------	-------------------	-----------------	-------------------	---------------------	-------------------

This product is most frequently chosen because of the right balance between functionality and price. Available in many different decors. Further description is to be found below.

In Standard

- > 5-chamber profile
- > Installation depth 70 mm
- > Low aluminium threshold
- > Automatic 3-point lock
- > Glazing beads Soft-line or Round-Line

Options

- > Inner panel flat or with design (white or any colour)
- > Panic bar / knob handle > Manual 5 point locking espagnolette
- > Special security cylinder > Special security on side of hinges



HST System (Lift&Sliding) – a perfect solution for terrace and garden.

In Standard

- > 6-chamber profile
- > Installation depth 85 mm
- > Low aluminium threshold
- > Automatic 3-point lock
- > Glazing beads Soft-line or Round-Line

Options

- > Inner panel flat or with design (white or any colour)
- > Panic bar / knob handle > Manual 5 point locking espagnolette > Special security cylinder
- > Special security on side of hinges > available door leaf one-or-both-sides-flat



PVC

PVC Windows

Our windows, **French Doors**, and doors with excellent thermal properties are produced using the newest window technology and under constant quality control. They combine the condition of engineering with maximum living comfort and guarantee decades of pleasure. With a variety of décor colours, decorative bars and finishings, as well as the wide selection of accessories that we have to offer, windows can be created according to any taste or need.

ALUPLAST Monoblock Id 4000

Product designed for the French market; the dedicated frame for it is Monoblock.



In Standard

- > 5-chamber profile
- > Installation depth 142, 122, 72 mm
- > Standard glazing 4/16 Ar / 4T, $U=1.0 \text{ W/m}^2\text{K}$
- > Window sash Soft-Line or Round-Line
- > Metal handle
- > Two seals,

Options

- > 'Anti-burglar-fittings' (WK 1 or WK 2)
- > Triple glazing
- > A warm edge (spacer)
- > Invisible hinges (hidden between frame and sash)

ALUPLAST Id 8000-85

Very warm profile with 3 seals, dedicated to it is a special glass.



In Standard

- > 6-chamber profile
- > Installation depth 85 mm
- > Glazing 4/16 Ar / 4/16 Ar 4, $U=0,5 \text{ W/m}^2\text{K}$
- > Central seal system with 3 levels of sealing (middle seal)

Options

- > Glazing thickness of 20 to 51 mm
- > Circumferential fittings

PVC

< COLOURS

ALUPLAST Renovo 40 Id 4000-70 Renovo 65 Id 4000-70

White
AP-49

Grey
AP-34

Anthracite
AP-40

Gold Oak
AP-23

Walnut
AP-27

Dark Oak
AP-06

Dark Green
AP-30

Mahogany
AP-05


40 or 65 mm Renovation frame and a Round-Line or Soft-Line sash.

In Standard

- > 5-chamber profile
- > Installation depth 70 mm
- > Special renovation frames with a groove of 40 or 65 mm inside
- > Standard glazing 4/16 Ar / 4T, $U_g = 1.0 \text{ W / m}^2\text{K}$
- > Steel reinforcement closed
- > Window sash Round-Line or Soft-Line

Options

- > 'Anti-burglar-fittings' (WK 1 or WK 2)
- > Triple glazing
- > A warm edge (spacer)
- > Invisible hinges (hidden between frame and sash)
- > Balcony door with aluminium threshold (isolated)

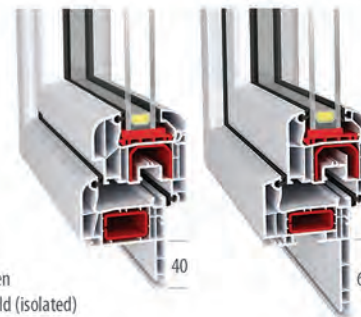

HST System (Lift&Sliding) – a perfect solution for terrace and garden.

In Standard

- > Installation depth 197 mm (sash depth 85 mm)
- > Thermal separation of aluminium doorsill for even better thermal insulation
- > Glazing 4/16 Ar / 4T/16A/4, $U_g = 0.5 \text{ W / m}^2\text{K}$
- > Large-sized reinforcements for optimum static properties
- > Two seals
- > Maximum height of doors up to 2600 mm
- > Maximum width up to 6500 mm (scheme A,D)
- > Very smooth running, even with large doors (400 kg)
- > Suitable for a generous living space



WOOD

Lift & Sliding system (HS)

Lift & Sliding system

Is a solution for big open glass surfaces. It also improves thermal insulation, is functional, and aesthetic. It is possible to apply wide profiles as well as covered mechanisms which can lift up to 400-kg-heavy sashes but also have energy-saving glass with $U_g=0,5 \text{ W/m}^2\text{K}$. The sliding mechanism (trucks) is hidden in the sash's frame. The handles and the rail are the only visible elements.

This system is highly suitable and economical for large-scale areas.

We are pleased to offer both aluminium and wooden thresholds as well as different sash depths (92 | 78 | 68 mm).




92 HS Soft-Line
(Aluminium threshold)



68 HS Soft-Line
(Wooden threshold)

In both the Soft-Line and the Retro profile there is NO Alu-drip.

In the RETRO profile, RETRO glazing beads are available



- 1 Inside: handle / Outside: hand lever
- 2 Inside: handle with cylinder for locking / Outside: hand lever
- 3 Both sides: handle with cylinder for locking




In standard a low aluminium threshold is offered (built into the ground and almost invisible).

Tilt & Slide system (PSK – Parallel slide)

Is an alternative to inward-opening windows or French Doors. There is optimal surface usage in the area of terrace and garden exits. In the PSK it is possible to tilt the leaf for ventilation and later to move it to the side. After opening, the leaves hide nearly behind each other so as not to occupy the space of a room. When closed they look identical to inward opening, TT windows, or balcony doors. Available with window threshold (in standard) or low threshold (20 mm - optional).

The PSK-door is an innovative type which entails a variety of advantages due to its construction.



Retro profile with Retro glazing beads available

In standard


- > double glazing
- > weatherboard aluminium
- > EPDM seals white or brown
- > Soft-Line profile

Optional

- > Other colours of caps to cover the ironmongery (sliding system):



68 PSK Soft-Line

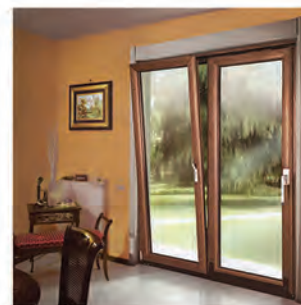

Optional: Second sash with Turn & Tilt, Tilt & Turn function, or with only a fixed panel (standard).



PSK Standard Threshold



PSK 20-mm Threshold (optional)

WOOD

Tilt & Slide system (PSK – Parallel slide)



WOOD


Wooden windows

Wooden windows guarantee comfort, perfect protection from cold, security, and soundproofing. Great colours and shapes, modern joints, and the possibility of using numerous accessories make fitting the window into any housing project easy. A variety of models exist. We manufacture different models in 3 installation depths: 68mm, 78mm and 92mm.

Inward opening TT

It's a modern window design used to produce inward opening TT (Turn&Tilt) windows in wooden frames with different finishes.

Available in pine, oak, and Meranti - in stains (Lazur) and RAL colours.



Eco (Soft-Line)



Classic (Retro)



Traditional (Soft-Line)

Outward opening

Casement windows are outward opening window construction. Internally glazed, with a modern concealed multi point locking system the design provides high security features. Available finishing: Flush (designed to replicate a period windows) and Stormproof.



Casement Flush 56



Casement Stormproof 68

WOOD

< COLOURS



White

Old pine

Sipo

Fredl

Oak

Calvados

Walnut

Afromosa

Vertical Sliding Sash windows - a traditional British construction. Available Sliding Sash Spiral Balance provides a lift mechanism with a tensioned spring. Predominantly used in new building construction. Sliding Sash Cords & Weights profile uses pulleys and weights as the lift system. Primarily used when dictated by building circumstances.



Wood-Alu windows are made of a mix of materials. The outer aluminium shell guarantees high structural stability. The wooden part inside ensures a cosy atmosphere and excellent thermal insulation.

Wood-Alu

Options

Available in pine, oak, and Meranti wood and in different shapes of aluminium



quadrat FB



linear



classic



68 | 78 | 92

ALU

Aluminium Windows

Aluminium enables an elegant and modern design and is available in a huge selection of colours. It offers a variety of design options, high stability, longevity and high weather resistance. This easy-to-maintain, extremely durable, fireproof material emits no chemical substances even at very high temperatures. Aluminium is environmentally friendly and 100% recyclable.

BLYWEERT Olimpia


Olimpia is special very high isolated profile of the 82 mm depth system.



- > Installation depth 82 mm (frame) and 91 mm (sash)
- > 3-chamber System
- > Thermo-liner
- > U-value of the window $U_w = 0,79 \text{ W} / \text{m}^2\text{K}$
- > Compatible with mosquito nets, shutters and blinds
- > Numerous glazing and filling with a thickness of 22 to 69 mm

BLYWEERT Triton HI

Triton HI is a special, highly insulated variation of the 72-mm Triton system. Profiles in this system are composed of insulated cells to block the movement of air naturally, natural form, separated by air chambers.



- > Installation depth 72 mm (Frame) and 81 mm (sash)
- > 3-chamber System
- > Thermo-liner
- > U-value of the window $U_w = 1,3 \text{ W} / \text{m}^2\text{K}$
- > Compatible with mosquito nets, shutters and blinds
- > Numerous glazing and filling with a thickness of 19 to 60 mm

www.win2trade.com

10

* Heat transfer coefficient for reference window 1230 x 1480 mm



RAL 9003

RAL 9002

RAL 7032

RAL 7046

RAL 9006

RAL 7043

RAL 3020


RAL 8017

ALU

< COLOURS


Hercules is a system to produce doors, windows, and fixed sites. It is used both in residential and public buildings such as schools, offices, hospitals, banks, gas stations, etc.

- > Installation depth 67 mm (frame) and 72 mm (leaf)
- > 3-chamber System
- > Insulating value $U_w = 1,46 / \text{m}^2\text{K}$
- > Higher thermal insulation
- > Numerous glazing and fillings with a thickness of 12 to 60 mm



Apollo enables the production of doors, windows, and sites suitable to warm environments. Practical arrangements allow the creation of a wider product range.


- > Installation depth 51 mm (frame) and 60 mm (leaf)
- > 2 chamber profile
- > Thermal values $2,6 / \text{m}^2\text{K}$ and $3,1 / \text{m}^2\text{K}$



11

BLINDS

Labels:

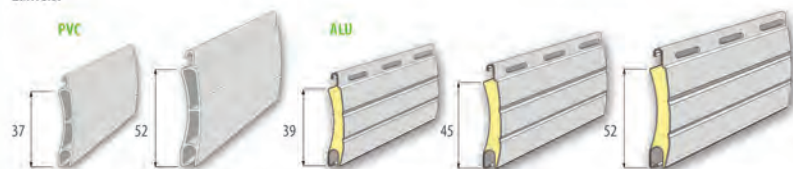

Adjustable blinds

Adjustable blinds may be mounted either in new buildings or in renovated old buildings, at any moment necessary. All blinds available with rolling mosquito net.

Standard



Rollolux



Omega



Intermo



Box sizes (H x D) available


135 x 138
150 x 151
165 x 180
180 x 181
205 x 206

150 x 150
180 x 181
205 x 206


137 x 153
165 x 184
180 x 201
205 x 229

137 x 138
165 x 166
180 x 181
205 x 206

[mm]

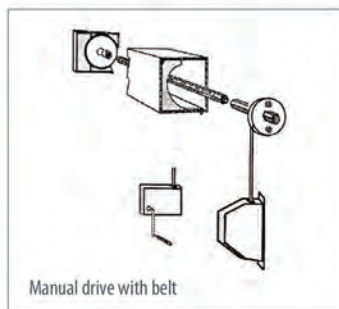

Manual drive with belt



Drive with manual crank
(Cardan's mechanism)

www.win2trade.com

12

BLINDS

< COLOURS

MONOBLOCK Composition blinds



White
AP-49

Grey
AP-34

Anthracite
AP-40

Gold Oak
AP-23

Walnut
AP-27

Dark Oak
06

Schokoladenbraun

Mahogany

This product is most frequently chosen when installing windows and blinds at the same time. Available in many different decors and box warmth.

Classic



Box sizes (H x D) available

135 x 162
160 x 186
200 x 225

Termolux



160 x 253
200 x 253

Thermo Prestige



220 x 255

Thermo Prestige




220 x 255


[mm]

At the bottom of these 2 pages are the available drives listed.

Drives



Electric drive with
pushbutton switch



Electric drive
with remote control

13

ACCESSOIRES

We offer many kinds of handles in various styles.

Window handles

We offer a wide selection of different handles, including HOPPE handles.

Standard colours



- Colours**
- 1 - White (RAL 9016)
 - 2 - Brown (RAL 8019)
 - 3 - Satin
 - 4 - Old Gold
 - 5 - Silver

Hoppe




Door handles

We offer a wide selection of different handles, including HOPPE handles.

Standard



Hoppe models



www.win2trade.com

14



Window vents

Window ventilation systems provide a natural and also effective air exchange in offices and living spaces.



Glazing bars are a design element for windows. They are available in different widths and types.

Inner glazing bar



[mm]

8 | 18 | 26 | 45

Glue-on glazing bar




16 | 26 | 30
36 | 46 *

Vienna glazing bar



16 | 26 | 30
36 | 46 *



Construction glazing bar



60 | 78 | 84 | 106
130 | 136 *

*More information at our sales department

Examples of bar handles for extra comfort. Aluminum exterior window sills.

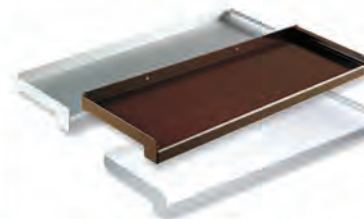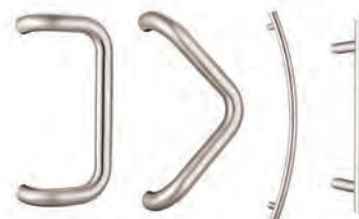

110 | 150 | 180 | 210 | 240 | 320

15

ACCESSOIRES

Glazing bars



Panic bars for doors window sills

